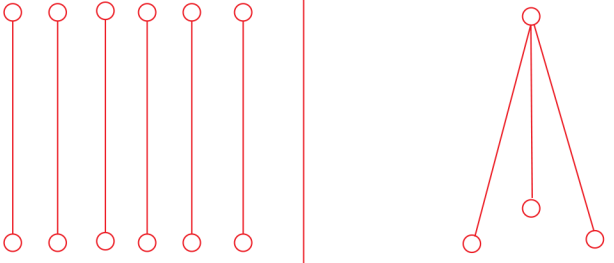
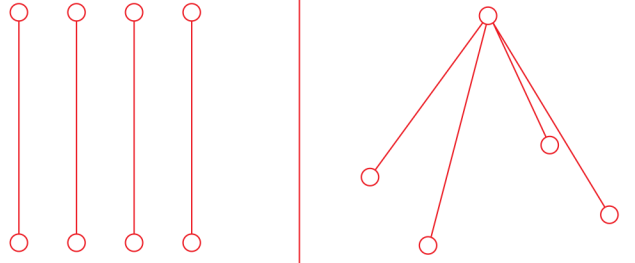


Rated Load for Single and Two-Leg Slings 6x19 or 6x36 Construction
Extra Improved Plow Steel (EIPS) Grade Independent Wire Rope Core (IWRC) Wire Rope
Based on Design Factor = 5 and Rated Loads Expressed in Tons (2,000 lb)

GOLD STANDARD SLINGS

Rope Diameter	Three-Leg				Four-Leg			
								
	Horizontal Angle				Horizontal Angle			
	Vertical	60 DEG	45 DEG	30 DEG	Vertical	60 DEG	45 DEG	30 DEG
	MS	MS	MS	MS	MS	MS	MS	MS
1/4	1.9	1.7	1.4	0.97	2.6	2.2	1.8	1.3
5/16	3.0	2.6	2.1	1.5	4.0	3.5	2.8	2.0
3/8	4.3	3.7	3.0	2.2	5.7	5.0	4.1	2.9
7/16	5.8	5.0	4.1	2.9	7.8	6.7	5.5	3.9
1/2	7.6	6.6	5.4	3.8	10	8.8	7.1	5.1
9/16	9.6	8.3	6.8	4.8	13	11	9.0	6.4
5/8	12	10	8.3	5.9	16	14	11	7.8
3/4	17	15	12	8.4	22	19	16	11
7/8	23	20	16	11	30	26	21	15
1	29	26	21	15	39	34	28	20
1 1/8	36	31	26	18	48	42	34	24
1 1/4	44	38	31	22	59	51	42	30
1 3/8	53	46	38	27	71	62	50	36
1 1/2	63	55	45	32	84	73	60	42
1 5/8	73	63	52	37	98	85	69	49
1 3/4	85	74	60	42	113	98	80	57
1 7/8	97	84	68	48	129	112	91	64
2	110	95	78	55	147	127	104	73

Rated loads based on minimum D/d ratio of 25/1.

Rated load based on pin diameter no larger than natural eye width or less than the nominal sling diameter.

For choker hitch, the angle of choke is 120 deg or greater.

TWAY LIFTING PRODUCTS